


REAR.

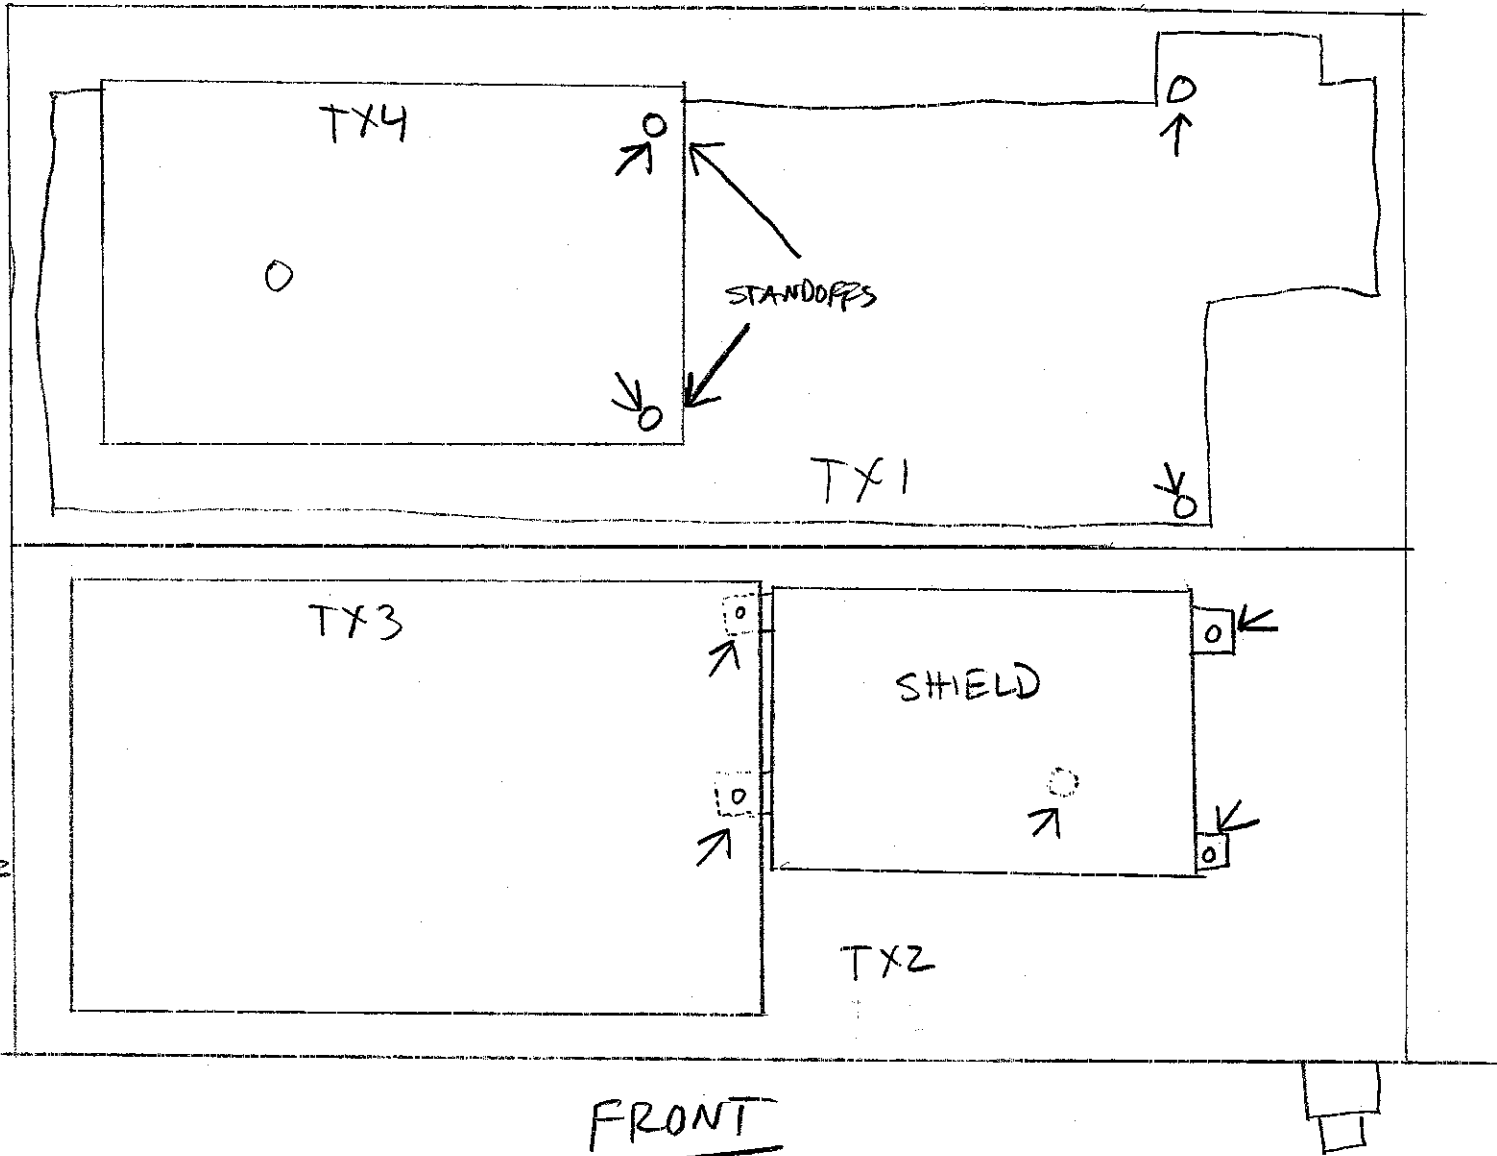

THERE ARE 9
SCREWS AND 2
STANDOFFS THAT
NEED TO BE REMOVED
IN ORDER TO REMOVE
THE BOTTOM LID.

- 1.) LIFT THE TX3
AND REMOVE THE 4
SHIELD SCREWS
- 2.) REMOVE 1 SCREW
THAT IS UNDER THE
SHIELD ON TX2.
- 3.) REMOVE 2 SCREWS
ON TX4, THEN
REMOVE 2 STANDOFF
THAT SUPPORT THE
TX4 BOARD
- 4.) REMOVE
2 SCREWS ON
RIGHT SIDE OF
TX1 BOARD.

FRONT