

Please do FACTORY RESET & EXP Calibration after you finish the firmware update. Then use the updated version of QuickTone to load your old patches back.

AMP Block: VIVO

Many users requested the iconic brown sound of EVH. We also love Eddie and want to pay tribute to him. So here it is, the VIVO.



The VIVO features our next-generation TS/AC-4K amp modeling with power amp transformer algorithm. You can feel the quick response for low end, which is distinguished from other high-gain amp models.

* The NUX algorithm team is working on TS/AC-4K currently, and we hope to bring you more in the near future. As you know, WHITE-BOX algorithm requires much more efforts to develop and optimize the Amp Modeling, especially related to DSP power. For the price of the MG-30, with free updates, it's MORE THAN EXPECTED! ^____^

EFX Block: RED FUZZ, TOUCH WAH

Looking for Fuzz? Filter? OK, we heard it. Here you are.




DLY Block: Φ PHI DELAY

Φ Phi Delay is a digital delay with golden ratio 2nd repeat head. It makes your guitar sound more musical. With simple tweaking, sub-division setup, smart tap tempo, you're ready to go.



VOL Block: MIN, MAX Settings & Flexible Order within Patch

Control the pre-gain? Swell your ambient effect? You can control the Volume pedal in a flexible signal chain for each patch.

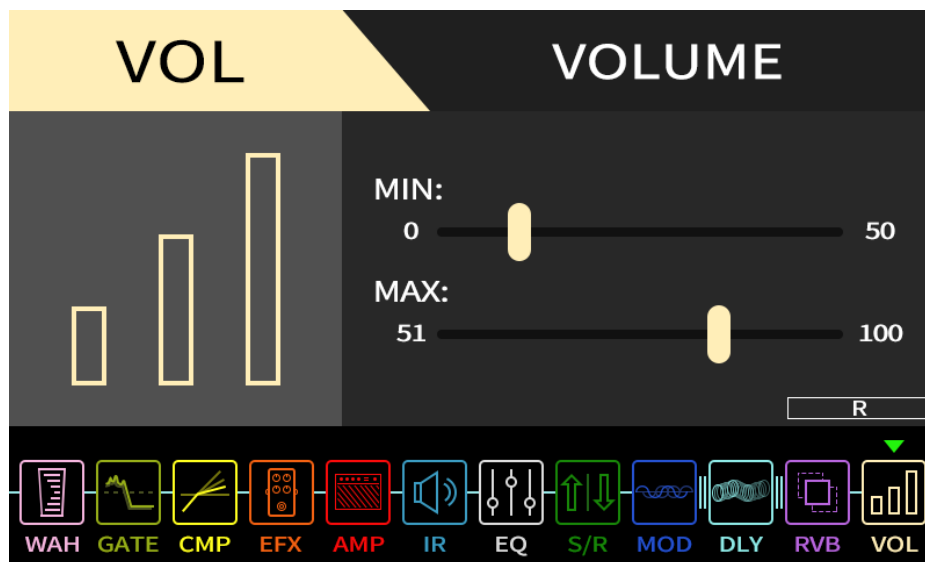

EXP, EXP1, Footswitch Assignment



CTRL Assignment: DLY -> S.Tap On/Off (Smart Tap Tempo)

SCENE -> S3 ON/OFF

Tip/Ring: SCENE, RVB HF

EXP/EXP1: short press -> Parameter MAX / MIN setup

* EXP pedal behavior with FX - after disengaging the pedal, FX goes back to the value before engaging the pedal.

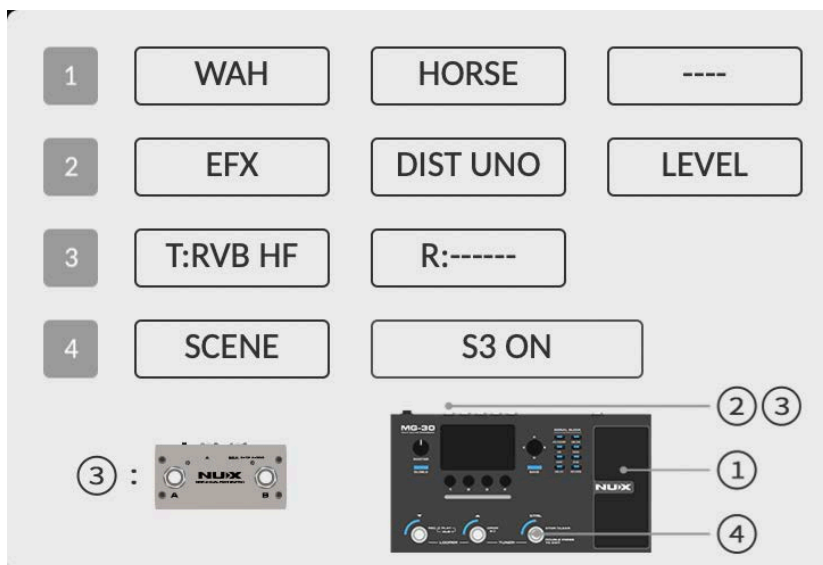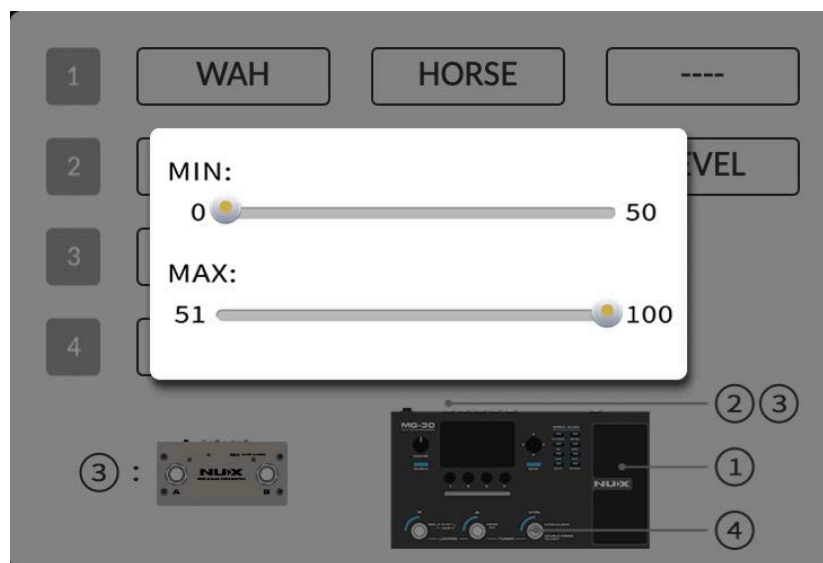

Patch Rolling

You can rotate the patches with the Joystick.

01A	CT-RectoBeast
01B	CT-DriveJCM
01C	CT-AmbientClean
01D	CT-PlexiLead
02A	PeteT 80's Clean
02B	PeteT Plexi Lead

System Restore

SYSTEM INSPECTION, GHOST BACKUP, GHOST RESTORE



In order to avoid unknown data missing accident, now you can do GHOST BACKUP on the device. Although not common, if a data error occurs, you can do GHOST RESTORE immediately.


To make sure GHOST BACKUP is completed, please do FACTORY RESET after you do GHOST BACKUP.


* We removed the old GHOST function on QuickTone™ accordingly, because the V3 data structure has been changed and the old GHOST is no longer compatible.

IR Collection: 24 Slots

Now the IR COLLECTION is loaded in the device directly, and you can choose any of them to USER slot (THIRD-PARTY).

*128 patches with USER slots + 24 IR COLLECTION slots = 162 slots

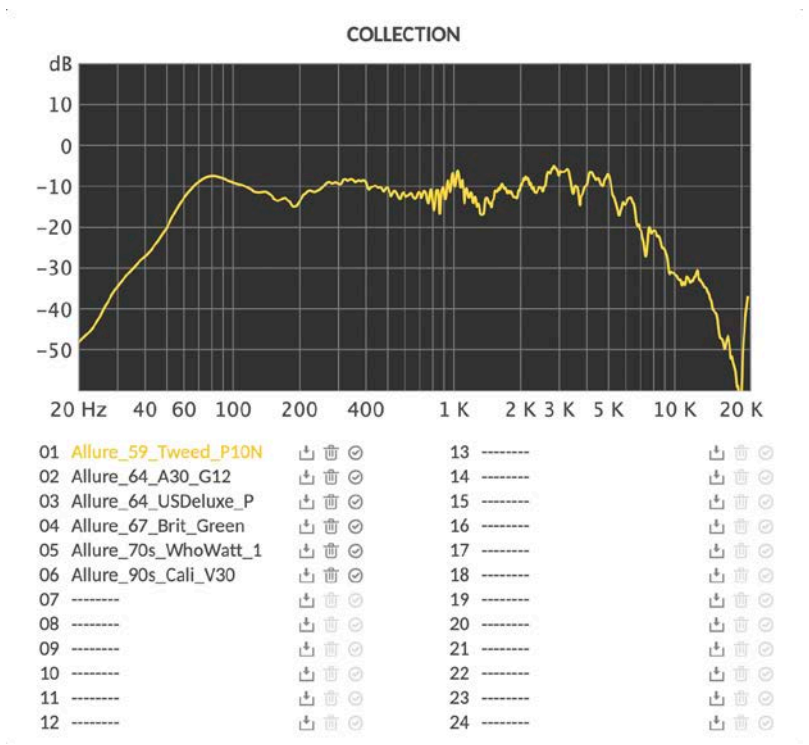

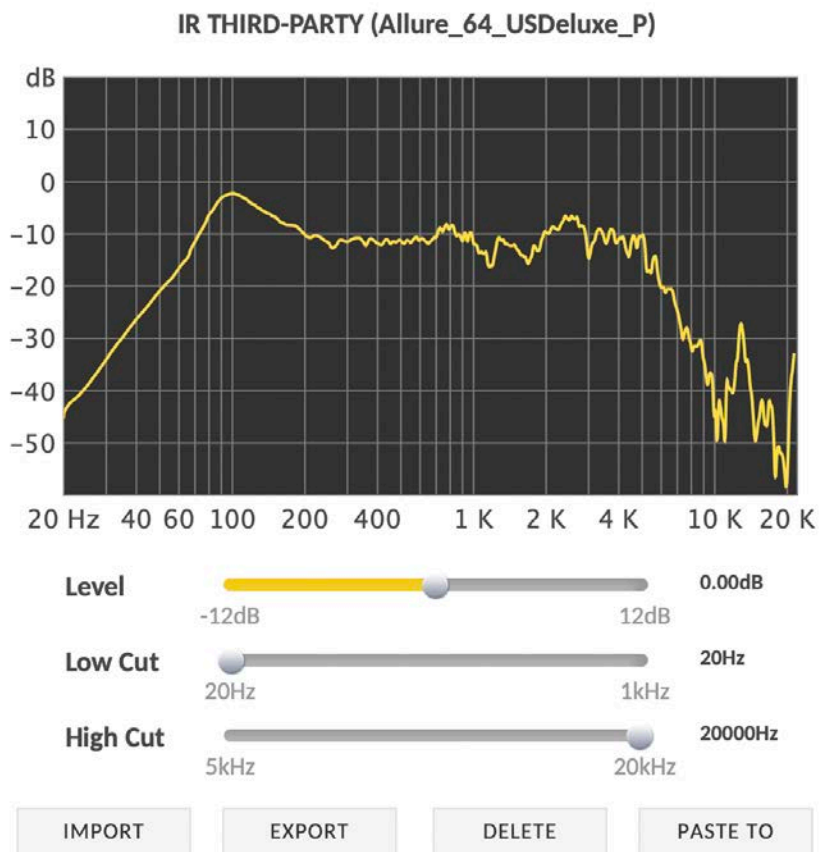

USB Routing: Normal with Dry/Wet

Normal with Dry/Wet for Plug-In application.

Routing Mode

